

D7025

70x70x25mm
(2.76"x2.76"x0.98")




HOUSING Thermoplastic PBT, UL94V-0
 IMPELLER Thermoplastic PBT, UL94V-0
 BEARING Ball or Sleeve
 OPERATING TEMPERATURE -10°C to + 60°C
 INSULATION RESISTANCE 10M Ohms Min.@500 VDC
 DIELECTRIC STRENGTH 5 mA Max. at 500 VAC 60Hz for 1 minute
 WEIGHT 85g
 ROHS COMPLIANCE Yes

70 mm

70mm

DC Fans & Blowers

DIMENSION

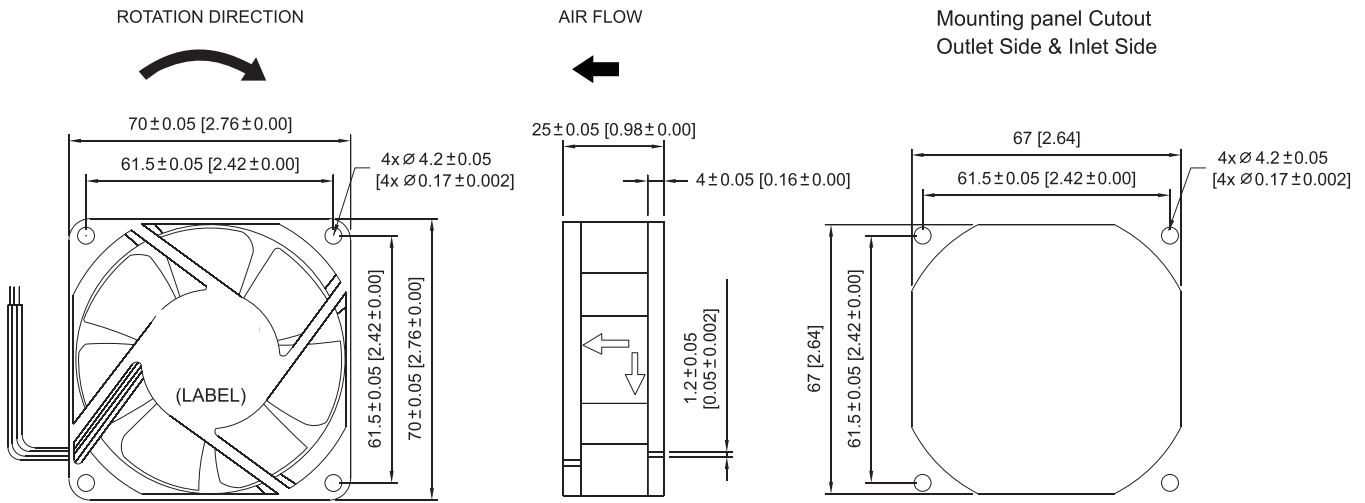

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D7025V12SH	12	0.62	7.44	6000	0.55	14.00	54.00	1.53	48
D7025V12H	12	0.52	6.24	5500	0.45	11.49	49.36	1.40	45
D7025V12M	12	0.33	3.93	5000	0.39	9.88	45.31	1.28	30

AIR PERFORMANCE

