

D8010-CT




80x80x10mm
(3.15"x3.15"x0.39")



HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION RESISTANCE	10M Ohms Min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500VAC 60Hz for 1 second
WEIGHT	39g
ROHS COMPLIANCE	Yes

DIMENSION

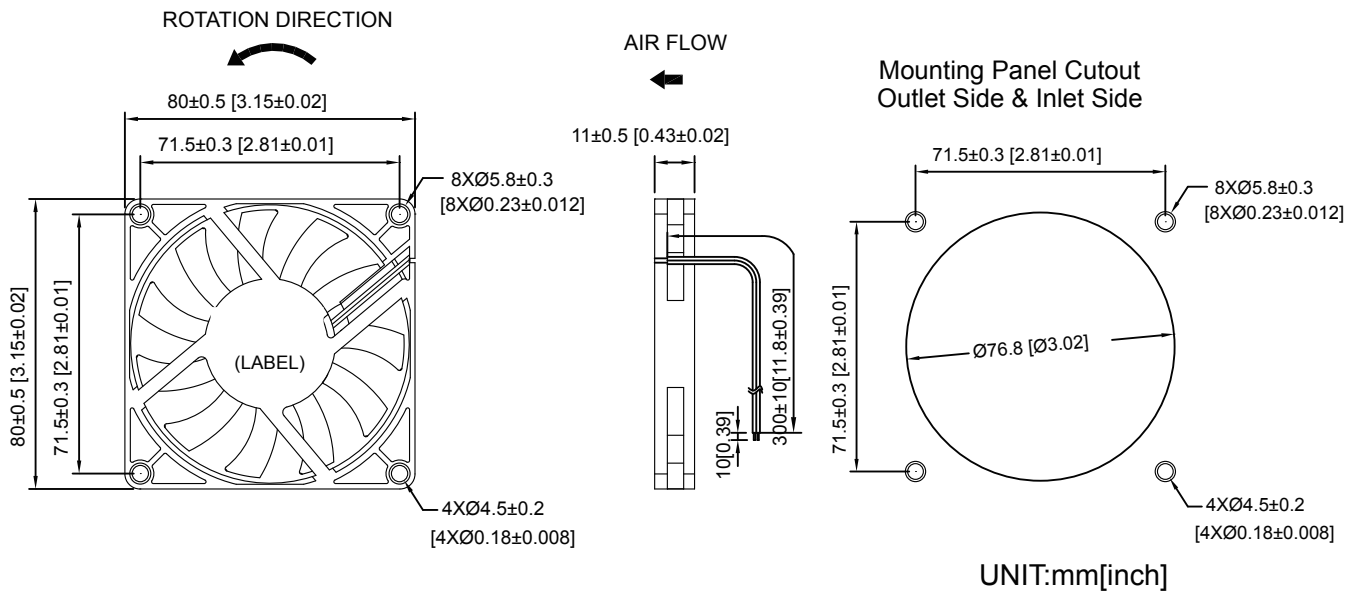

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D8010V12SL-CT	12	0.27	3.24	3500	0.10	2.62	32.67	0.93	39.7
D8010V5H-CT	5	0.31	1.55	3000	0.08	1.92	28.00	0.79	34.2
D8010V5M-CT	5	0.22	1.1	2500	0.05	1.35	23.52	0.67	28.6
D8010V5L-CT	5	0.18	0.9	2100	0.04	0.94	19.60	0.56	24.2
D8010V5XL-CT	5	0.10	0.5	1600	0.02	0.55	14.92	0.42	18.6

AIR PERFORMANCE

