

D8015

80x80x15mm
(3.15"x3.15"x0.6")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to +60°C
INSULATION RESISTANCE	10M Ohms Min. @500 VDC
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute
WEIGHT	59g
ROHS COMPLIANCE	Yes

80mm

80mm

DC Fans & Blowers

DIMENSION

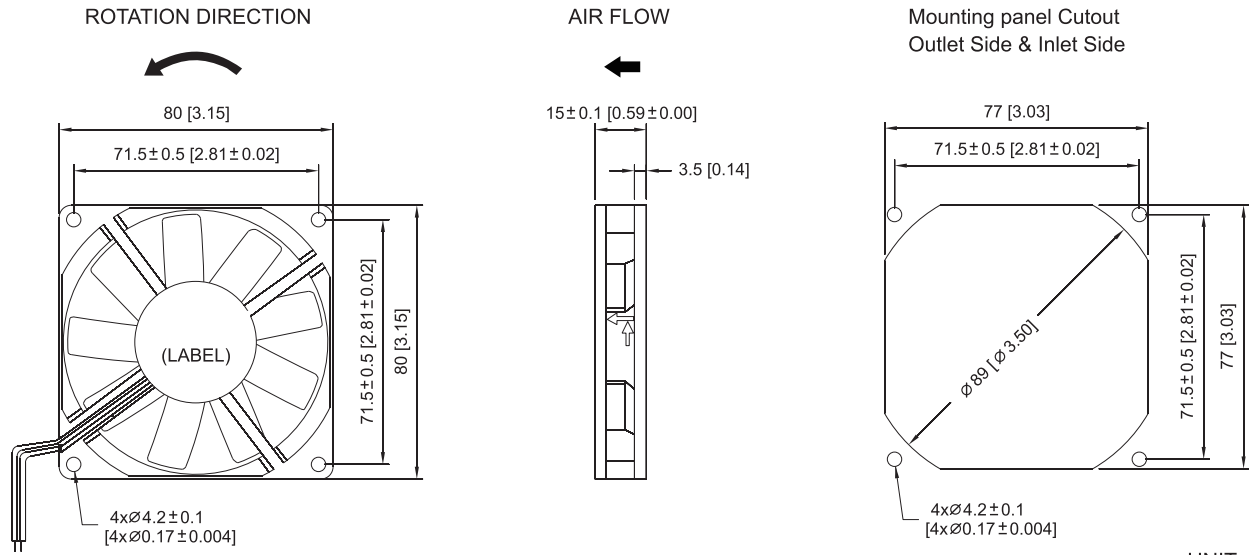

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D8015V12SM	12	0.45	5.40	4000	0.22	5.50	51	1.44	42
D8015V12SL	12	0.35	4.20	3500	0.17	4.40	45	1.27	40
D8015V12H	12	0.22	2.64	3000	0.13	3.20	39	1.10	35
D8015V12M	12	0.17	2.04	2500	0.09	2.30	32	0.91	31
D8015V24SM	24	0.24	5.76	4000	0.22	5.50	51	1.44	42
D8015V24SL	24	0.18	4.32	3500	0.17	4.40	45	1.27	40
D8015V24H	24	0.14	3.36	3000	0.13	3.20	39	1.10	35
D8015V24M	24	0.12	2.88	2500	0.09	2.30	32	0.91	31

AIR PERFORMANCE

