

# D8020-CT




80x80x20mm  
(3.15"x3.15"x0.78")



HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION RESISTANCE	10M Ohms Min. @500VDC
DIELECTRIC STRENGTH	5mA Max. at 500VAC 60Hz for 1 second
WEIGHT	62g
ROHS COMPLIANCE	Yes

## DIMENSION

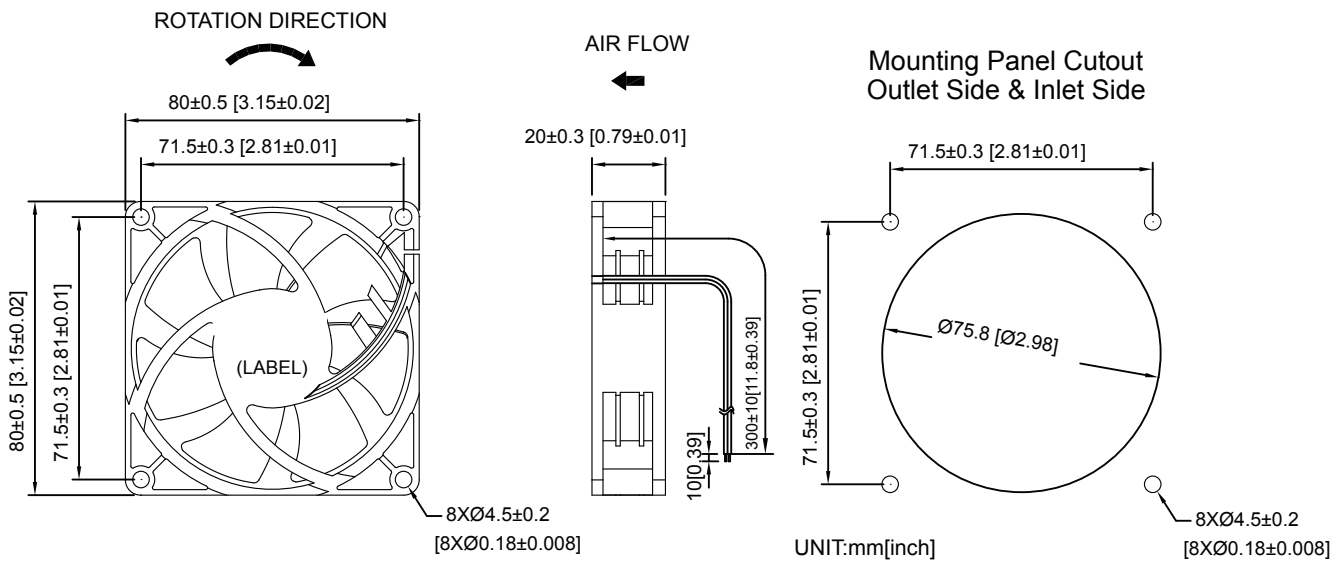

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
D8020V12H-CT	12	0.20	2.4	3650	0.18	4.60	39.94	1.13	35.8

## AIR PERFORMANCE

