

D 8025-K

80x80x25mm
(3.15"x3.15"x0.98")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to +70°C
INSULATION RESISTANCE	10M Ohms Min.@500 VDC
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute
WEIGHT	48g
ROHS COMPLIANCE	Yes

80 mm

80mm

DIMENSION

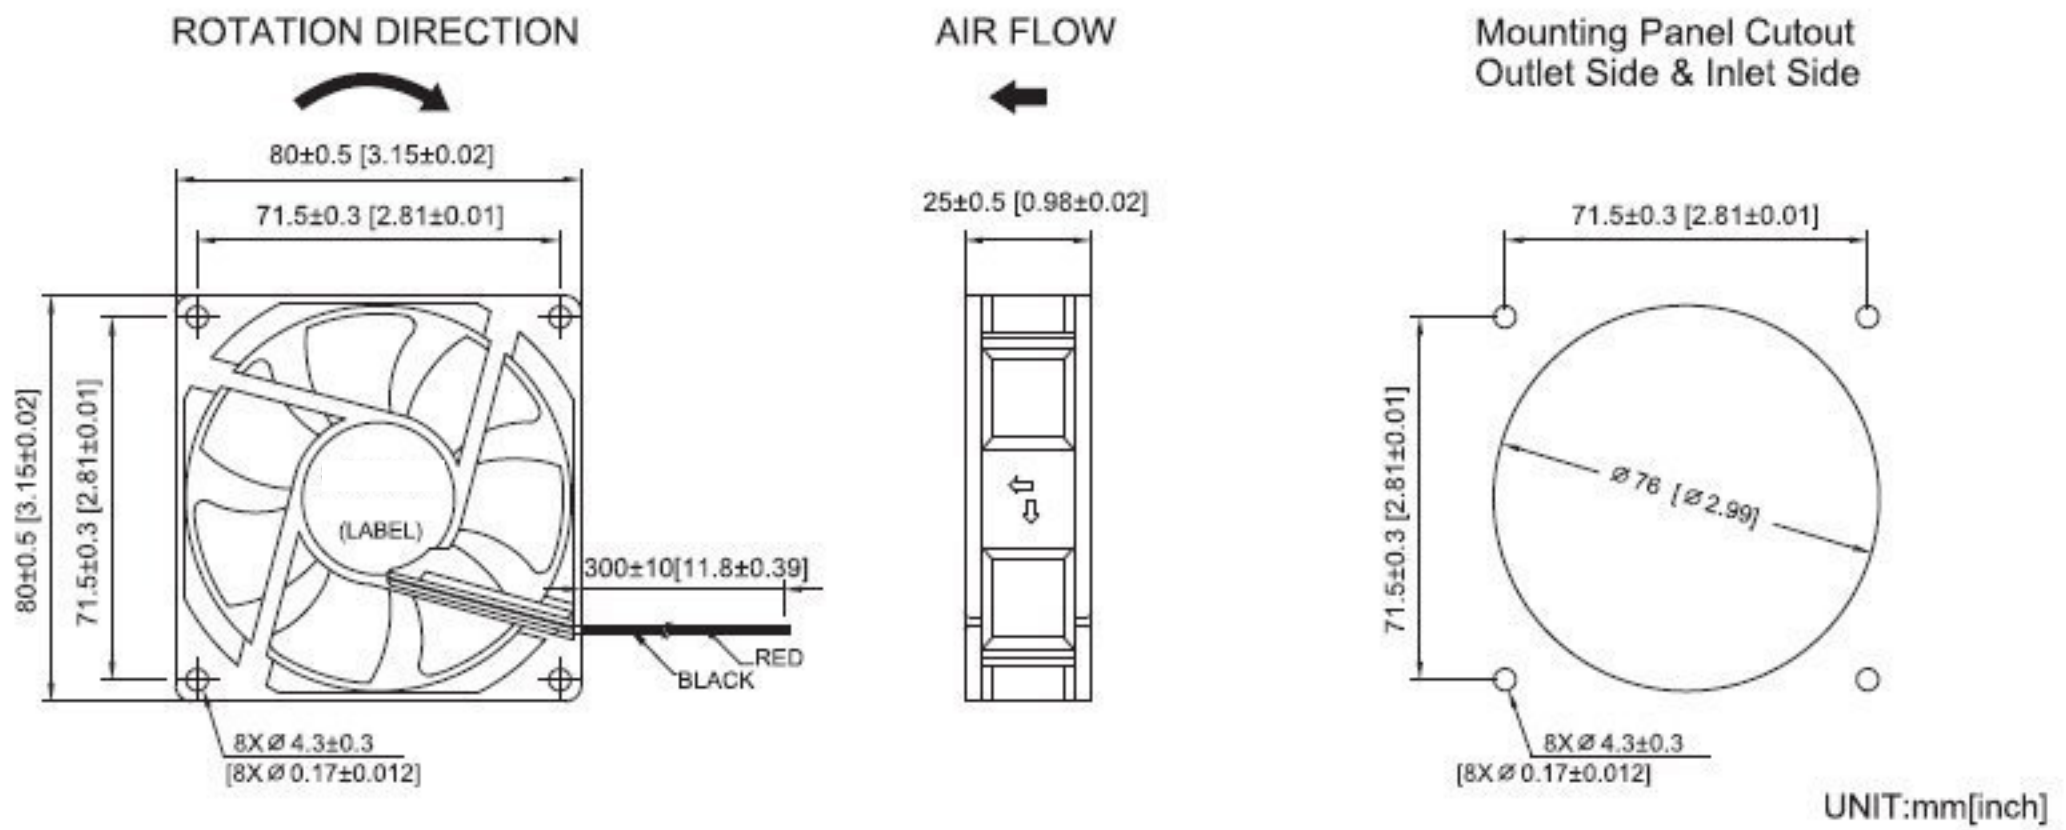

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D8025V12H-K	12	0.35	4.20	4300	0.29	7.4	55	1.56	40
D8025V12M-K	12	0.28	3.36	3600	0.21	5.4	46	1.31	36
D8025V12L-K	12	0.18	2.16	3000	0.15	3.9	38	1.09	31
D8025V12XL-K	12	0.13	1.56	2700	0.12	3.1	34	0.98	28
D8025V24H-K	24	0.21	5.04	4300	0.29	7.4	55	1.56	40
D8025V24M-K	24	0.16	3.84	3600	0.21	5.4	46	1.31	36
D8025V24L-K	24	0.10	2.40	3000	0.15	3.9	38	1.09	31
D8025V24XL-K	24	0.09	2.16	2700	0.12	3.1	34	0.98	28
D8025V48L-K	48	0.09	4.32	3000	0.15	3.9	38	1.09	31
D8025V48XL-K	48	0.07	3.36	2700	0.12	3.1	34	0.98	28

AIR PERFORMANCE

