

D8025D-9CT



80x80x25mm
(3.15"x3.15"x0.98")



HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION RESISTANCE	10M Ohms Min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500VAC 60Hz for 1 second
WEIGHT	100g
ROHS COMPLIANCE	Yes

DIMENSION




ROTATION DIRECTION



AIR FLOW



Mounting Panel Cutout
Outlet Side & Inlet Side

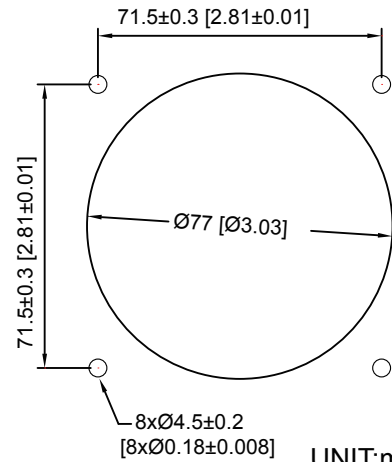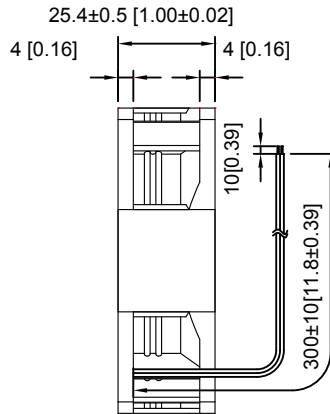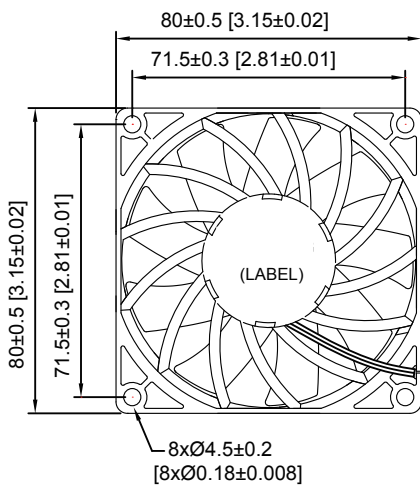

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D8025V48MBD-9CT	48	0.22	10.56	5700	0.50	12.71	84.97	2.40	53.2

AIR PERFORMANCE

