D8038D-AS

80x80x38mm
(3.12"x3.12"x1.482")

HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION RESISTANCE	10M Ohms Min. @500VDC
DIELECTRIC STRENGTH	5mA Max. at 500VAC 60Hz for 1 second
WEIGHT	212g
ROHS COMPLIANCE	Yes

DIMENSION

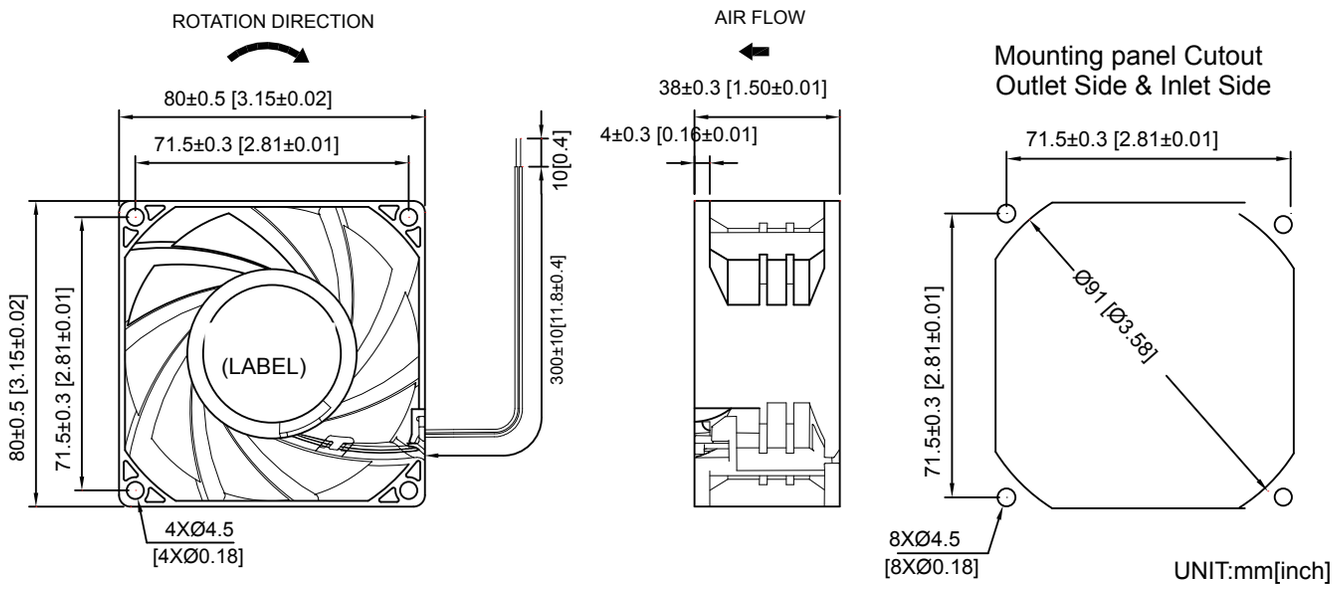

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH_2O	mmH_2O	CFM	m^3/min	
D8038V24HBD-AS	24	0.12	26.88	9000	2.01	51.06	133.70	3.79	64.6
D8038V24MBD-AS	24	0.80	19.20	8000	1.61	41.02	114.01	3.23	61.9
D8038V24LBD-AS	24	0.59	14.16	7000	1.21	30.78	99.44	2.82	58.9
D8038V24XLBD-AS	24	0.37	8.88	6000	0.90	22.96	82.23	2.33	55
D8038V12HBD-AS	12	2.50	30	9000	2.01	51.06	133.70	3.78	64.6
D8038V12MBD-AS	12	1.80	21.60	8000	1.61	41.02	114.01	3.29	61.9
D8038V12LBD-AS	12	1.25	15	7000	1.21	30.78	99.44	2.82	58.9
D8038V12XLBD-AS	12	0.80	9.6	6000	0.904	22.96	82.23	2.33	55
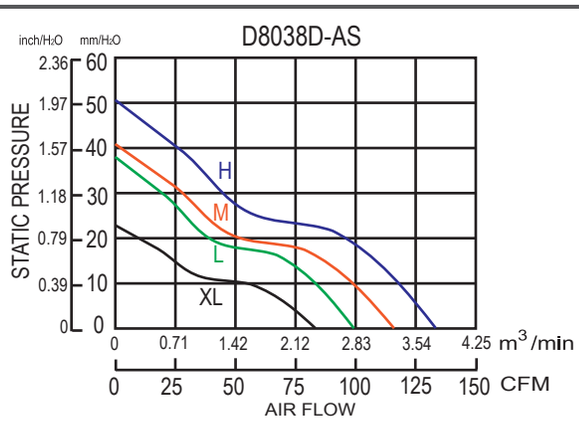
AIR PERFORMANCE