

# DB12131-C

120.7x120.7x31mm  
(4.75"x4.75"x1.22")




HOUSING Thermoplastic PBT, UL94V-0  
 IMPELLER Thermoplastic PBT, UL94V-0  
 BEARING Ball or Sleeve  
 OPERATING TEMPERATURE -10°C to +60°C  
 INSULATION RESISTANCE 10M Ohms Min. @500 VDC  
 DIELECTRIC STRENGTH 5 mA Max. at 500 VAC 60Hz for 1 minute  
 WEIGHT 260g  
 ROHS COMPLIANCE Yes

# 121mm

121mm

DC Fans & Blowers

## DIMENSION

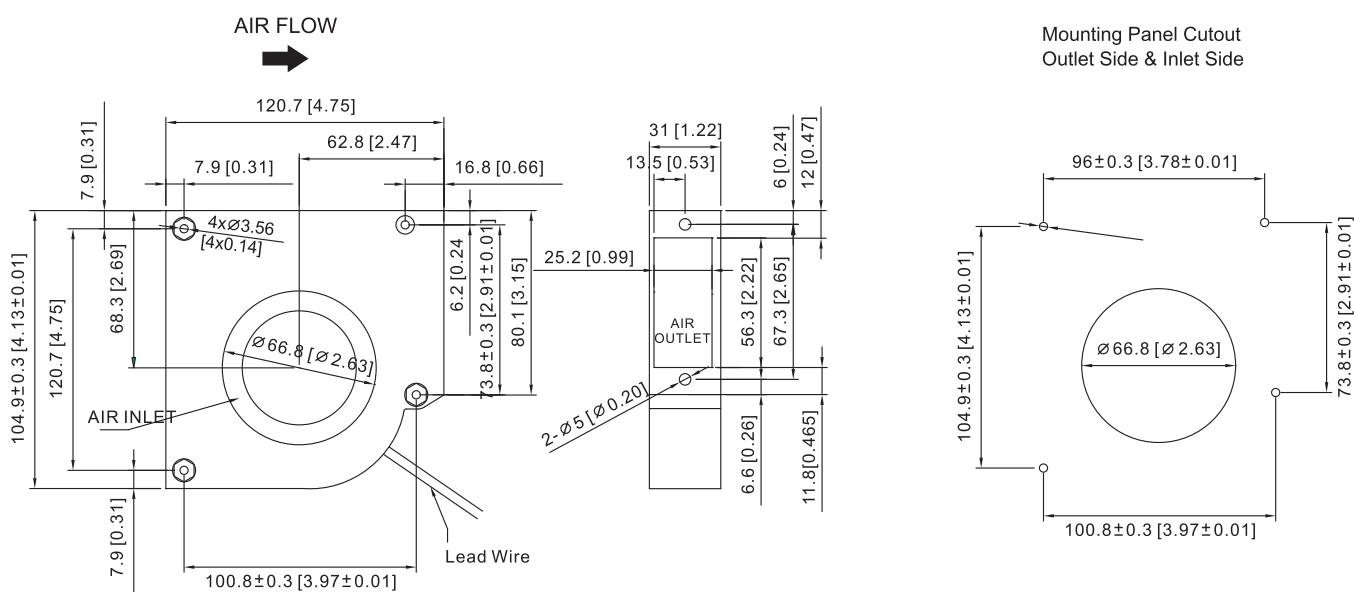

UNIT:mm[inch]

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
DB12131V12H-C	12	0.90	10.8	3500	1.01	25.8	35.0	0.98	45
DB12131V24H-C	24	0.55	13.2	3500	1.01	25.8	35.0	0.98	45

## AIR PERFORMANCE

