

# DB12137

121x121x37mm  
(4.76"x4.76"x1.46")




- HOUSING: Spiral Housing of Fiberglass-Reinforced Polycarbonate  
Housing Base of Galvanized Steel Plate
- IMPELLER: Thermoplastic PBT, UL94V-0
- BEARING: Ball or Sleeve
- OPERATING TEMPERATURE: -10°C to +60°C
- INSULATION RESISTANCE: 10M Ohms Min. @500 VDC
- DIELECTRIC STRENGTH: 5 mA Max. at 500 VAC 60Hz for 1 minute
- WEIGHT: 500g
- ROHS COMPLIANCE: YES

# 121mm

121mm

DC Fans & Blowers

## DIMENSION

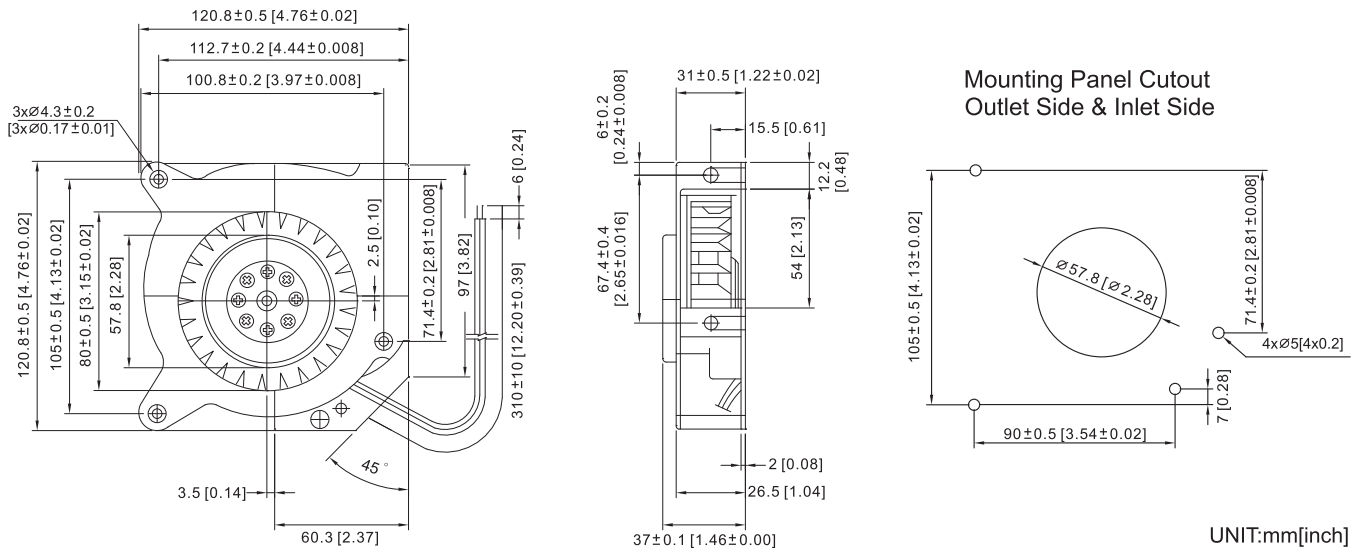

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
DB12137V12H	12	0.95	11.5	2800	0.75	19.05	26	0.73	55
DB12137V12M	12	0.63	7.5	2500	0.52	13.21	22	0.62	52
DB12137V24H	24	0.42	10.0	2800	0.75	19.05	26	0.73	55
DB12137V24M	24	0.31	7.5	2500	0.52	13.21	22	0.62	52
DB12137V48H	48	0.23	11.0	2800	0.75	19.05	26	0.73	55
DB12137V48M	48	0.16	7.7	2500	0.52	13.21	22	0.62	52

## AIR PERFORMANCE

