

DB 2608




26x20x8mm
(1.02"x0.78"x0.31")



HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Thermoplastic PBT, UL94V-0
Thermoplastic PBT, UL94V-0
Axially-grooved
-10°C to + 60°C
10M Ohms mins @ 500VDC
5mA Max. at 500VAC 60Hz for 1 second
25g
YES

DIMENSION

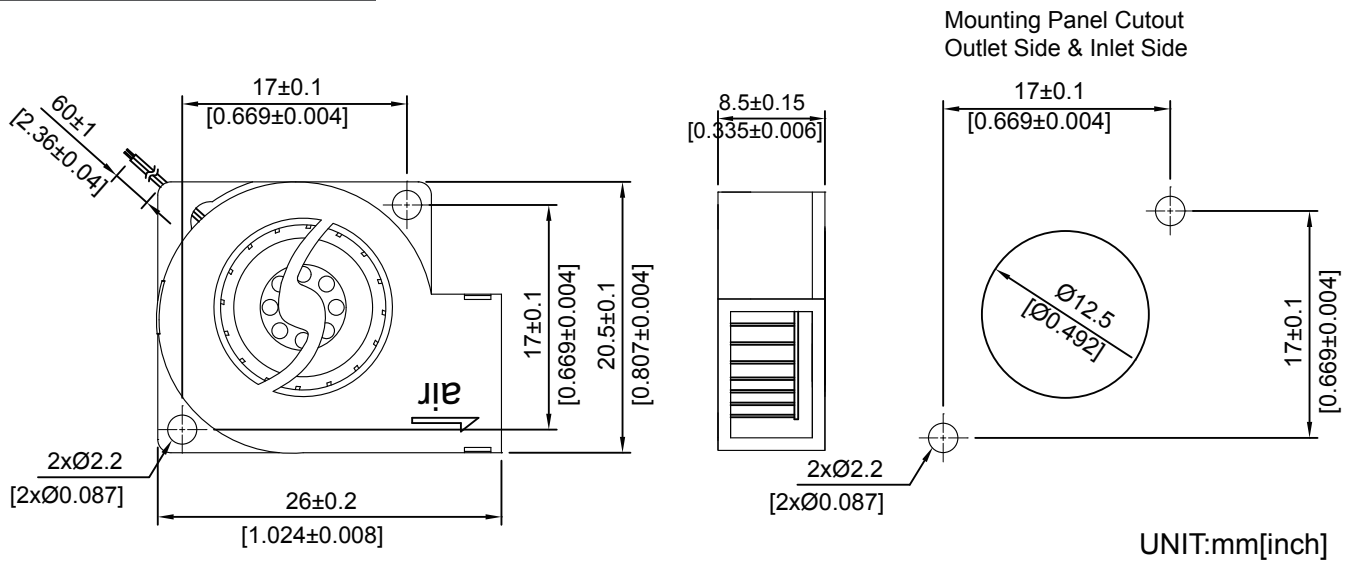

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D2608V3HS	3.3	50	0.165	7000	0.084	2.14	0.38	0.01	25
D2608V5HS	5	70	0.35	9000	0.186	4.73	0.57	0.016	<35

AIR PERFORMANCE

