

DB3004




30x30x4mm
(1.17"x1.17"x0.156")



HOUSING
IMPELLER
BEARING
OPERATING VOLTAGE RANGE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE

Aluminum Alloy
Thermoplastic PBT, UL94V-0
One Ball One Sleeve
-10°C to +60°C
10M Ohms Min. @500 VDC
5mA Max. at 500VAC 60Hz for 1 second
13g
Yes

DIMENSION

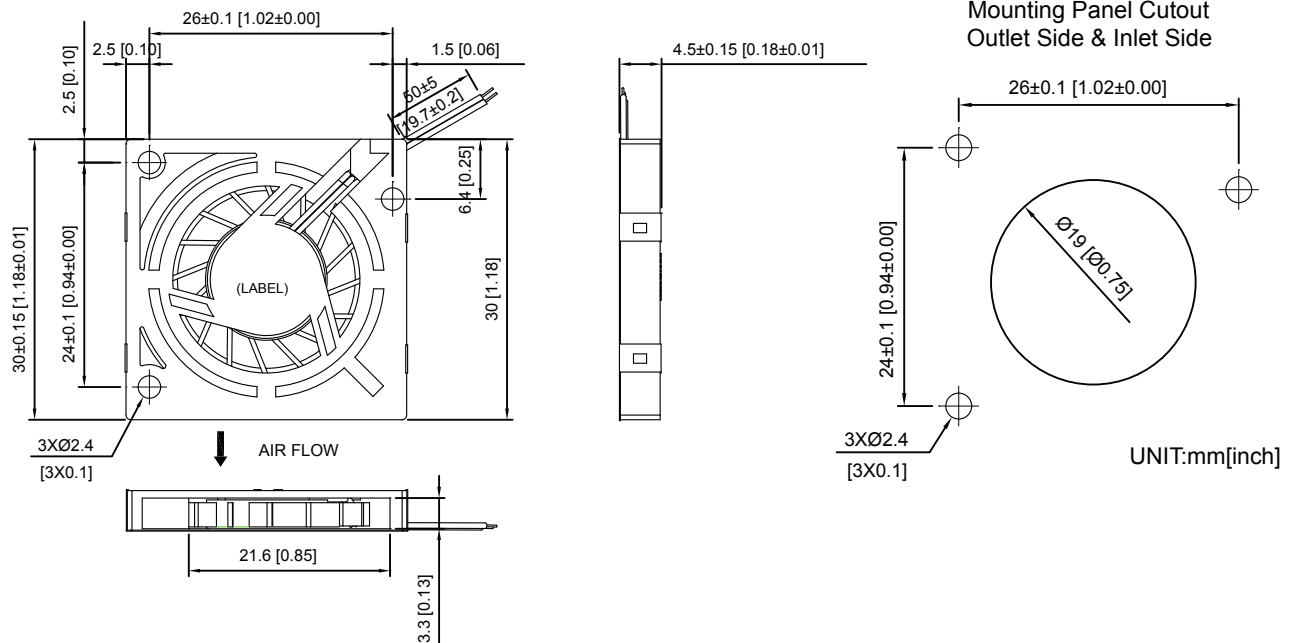

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
DB3004V3HB	3.3	0.05	0.165	6000	0.087	2.22	0.57	0.02	28
DB3004V5HB	5	0.075	0.375	8500	0.21	5.23	0.888	0.03	36

AIR PERFORMANCE

