


DB5015-C

51x51x15mm
(2.0"x2.0"x0.59")



HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
INSULATION RESISTANCE
DIELECTRIC STRENGTH
WEIGHT
ROHS COMPLIANCE


Thermoplastic PBT, UL94V-0
Thermoplastic PBT, UL94V-0
Ball or Sleeve
-10°C to +60°C
10M Ohms Min. @500 VDC
5 mA Max. at 500 VAC 60Hz for 1 minute
28g
Yes

50_{mm}

50mm

DC Fans & Blowers

DIMENSION

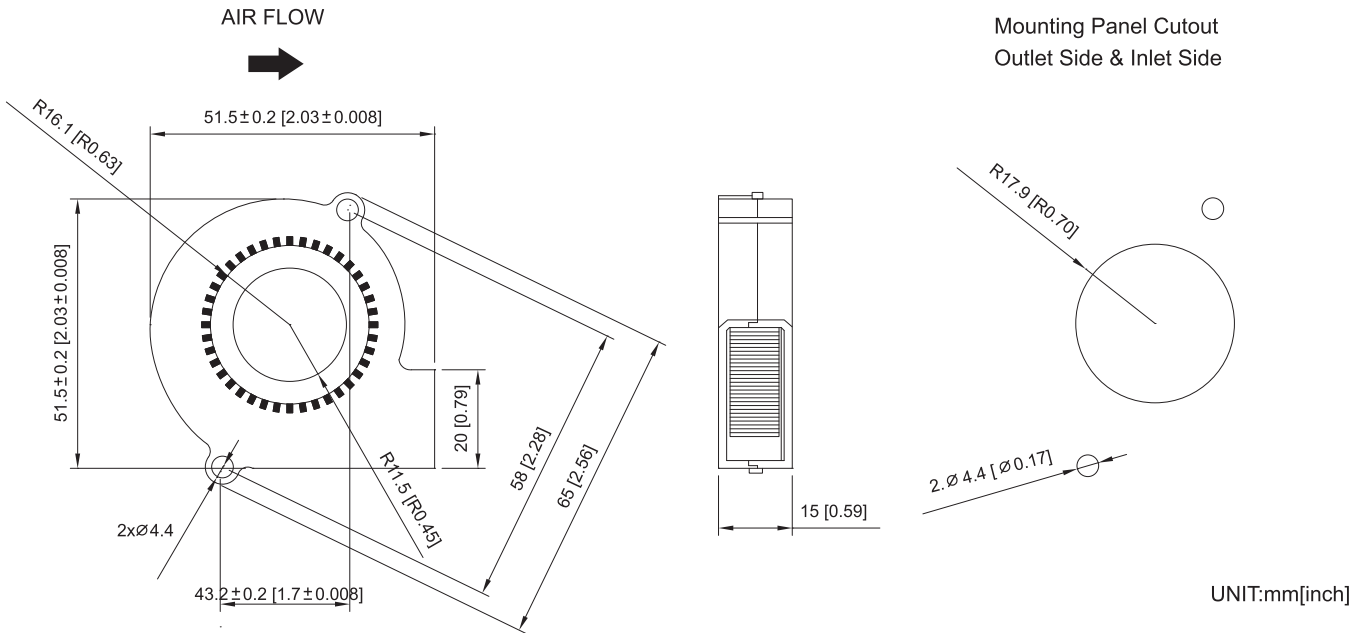

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
DB5015V5H-C	5	0.12	1.40	5000	0.70	17.78	4.40	0.12	38
DB5015V5M-C	5	0.10	0.90	4000	0.40	10.16	3.50	0.10	32
DB5015V5L-C	5	0.07	0.50	3000	0.24	6.09	2.50	0.07	25
DB5015V12H-C	12	0.12	1.78	5000	0.70	17.78	4.40	0.12	38
DB5015V12M-C	12	0.10	1.08	4000	0.40	10.16	3.50	0.10	32
DB5015V12L-C	12	0.07	0.72	3000	0.24	6.09	2.50	0.07	25

AIR PERFORMANCE

