

DB7630-K

76x75x30mm
(2.99"x2.95"x1.18")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to +60°C
INSULATION RESISTANCE	10M Ohms Min. @500 VDC
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute
WEIGHT	87g
ROHS COMPLIANCE	Yes

76mm

76mm

DC Fans & Blowers

DIMENSION

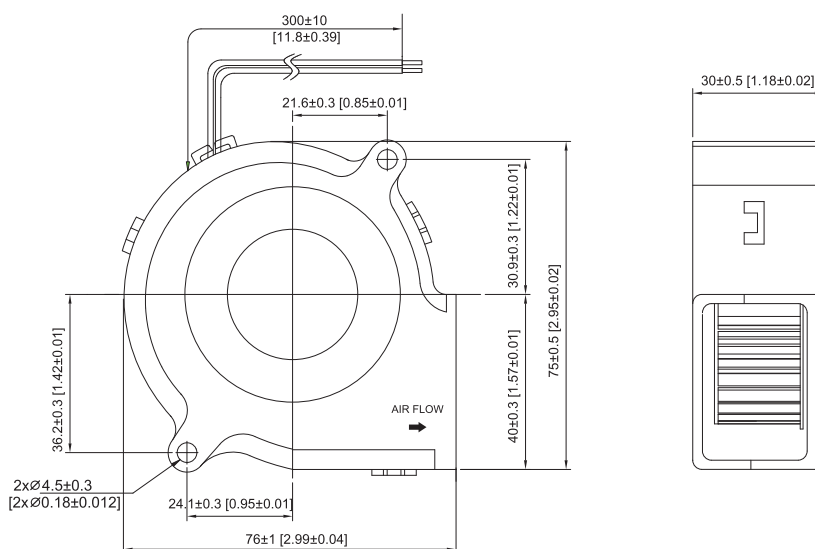

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
DB7630V12SL-K	12	0.42	5.04	4000	0.72	18.3	14.8	0.41	42
DB7630V12H-K	12	0.30	3.60	3500	0.56	14.1	13.0	0.36	42
DB7630V12M-K	12	0.18	2.16	2900	0.37	9.6	10.8	0.30	38
DB7630V12L-K	12	0.12	1.44	2350	0.29	7.4	9.7	0.28	32
DB7630V12XL-K	12	0.06	0.72	1900	0.19	4.9	7.9	0.22	26
DB7630V24SL-K	24	0.28	6.72	4000	0.72	18.3	14.8	0.41	42
DB7630V24H-K	24	0.20	4.80	3500	0.56	14.1	13.0	0.36	42
DB7630V24M-K	24	0.13	3.12	2900	0.37	9.6	10.8	0.30	38
DB7630V24L-K	24	0.09	2.16	2350	0.29	7.4	9.7	0.28	32
DB7630V24XL-K	24	0.06	1.44	1900	0.19	4.9	7.9	0.22	26

AIR PERFORMANCE

