DB 9733-K

97x94x33mm
(3.81"x3.70"x1.29")

HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 60°C
INSULATION RESISTANCE	10M Ohms Min. @500 VDC
DIELECTRIC STRENGTH	5 mA Max. at 500VAC 60Hz for 1 minute
WEIGHT	150g
ROHS COMPLIANCE	Yes

DIMENSION

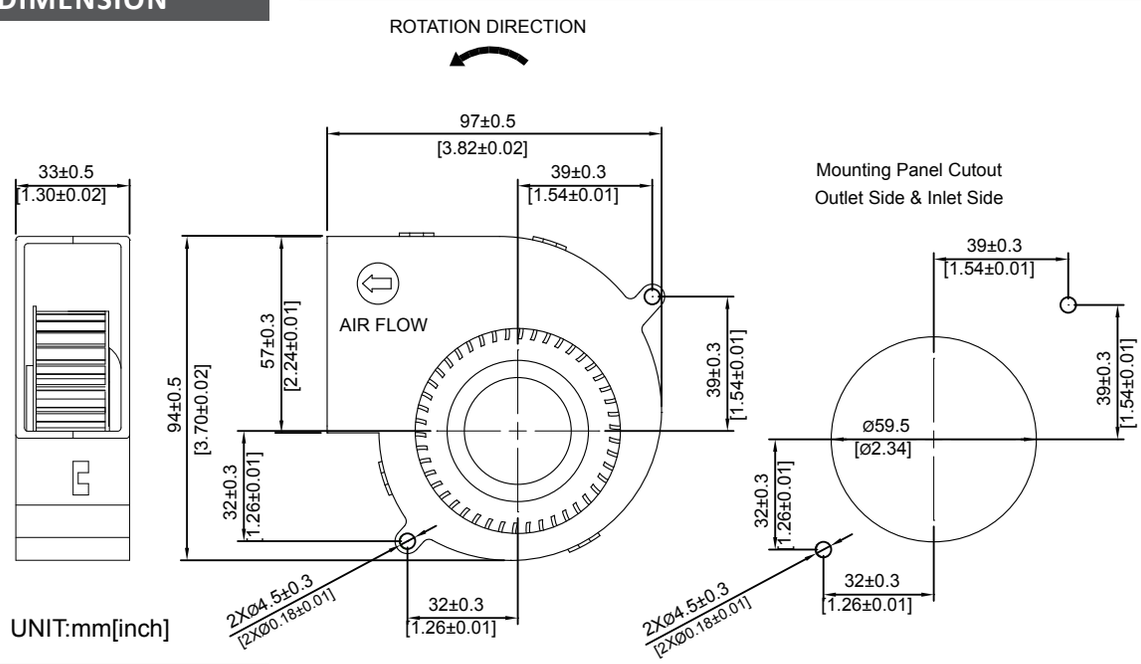

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH_2O	mmH_2O	CFM	m^3/min	
DB9733V12H-K	12	0.60	7.20	3600	0.55	14	21	0.59	52
DB9733V12M-K	12	0.32	3.84	2700	0.31	7.8	18	0.51	45
DB9733V12L-K	12	0.21	2.52	2200	0.20	5	14.5	0.41	43
DB9733V24H-K	24	0.32	7.68	3600	0.55	14	21	0.59	52
DB9733V12M-K	24	0.18	4.32	2700	0.31	7.8	18	0.51	45
DB9733V24L-K	24	0.14	3.36	2200	0.20	5	14.5	0.41	43
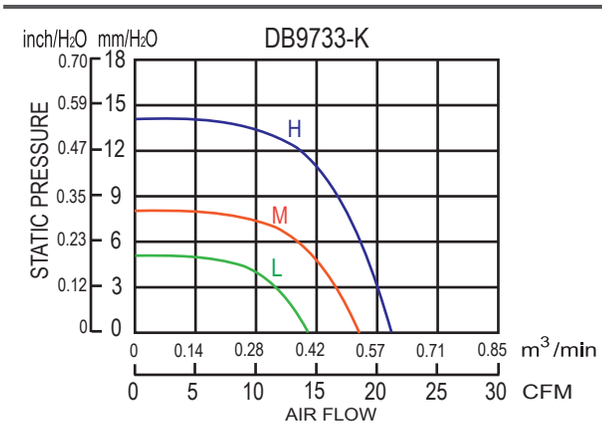
AIR PERFORMANCE