

E12038



120x120x38mm
(4.72"x4.72"x1.49")




HOUSING
IMPELLER
BEARING
MOTOR TYPE
TERMINATION
OPERATING VOLTAGE RANGE

DIELECTRIC STRENGTH
INSULATION
INSULATION RESISTANCE
OPERATING TEMPERATURE
WEIGHT
ROHS COMPLIANCE

Thermoplastic PBT + 30% Fiber Glass, UL94V-0
Thermoplastic PBT + 30% Fiber Glass, UL94V-0
Ball
Brushless EC Motor
Lead Wire
88VAC to 132VAC for 110V Type
180VAC to 265VAC for 220V Type
1,500VAC for 1 minute
Class F
10M Ohms Min. @500 VDC
-10°C to + 60°C
245g
Yes

DIMENSION

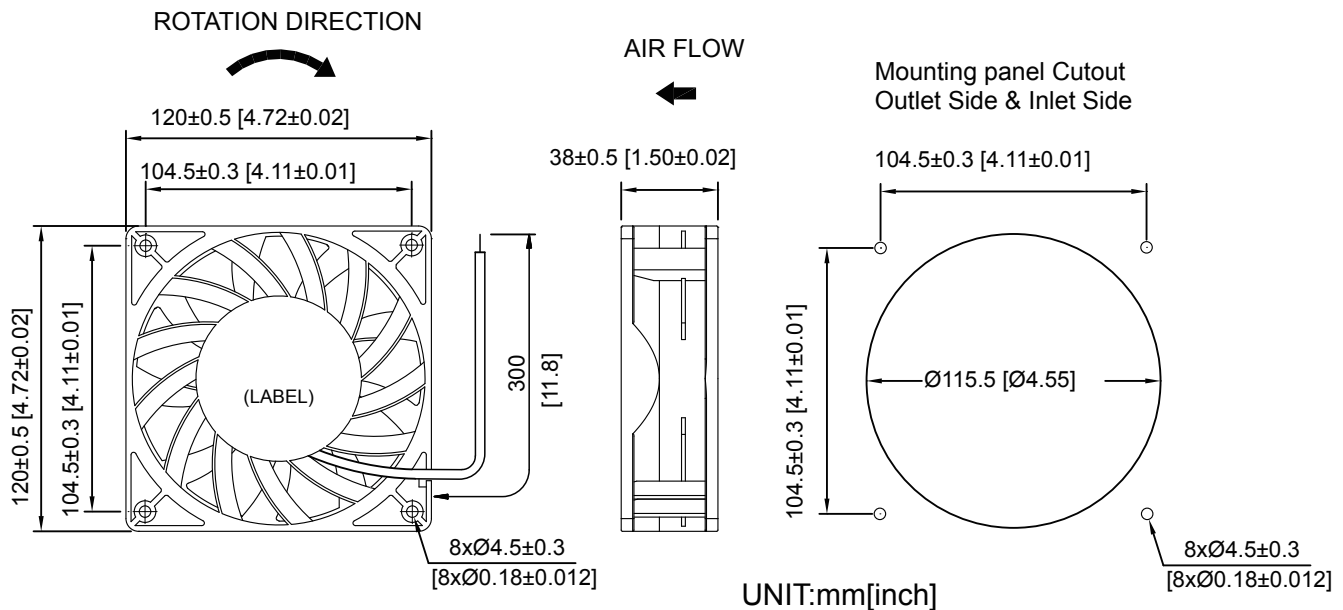

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @1M
E12038V1HBL	110	60	0.55	30	4500	0.96 24.38	220 6.24	62
E12038V2HBL	220	50	0.24	30	4500	0.96 24.38	220 6.24	62
E12038FVHBL	110-220	50/60	0.24-0.55	30	4500	0.96 24.38	220 6.24	62

AIR PERFORMANCE

