

## UU15.7LF SERIES ~ Common Mode Choke



RoHS Compliant


### AC Line Filters

#### PART NUMBERING SYSTEM

<b>UU</b>	<b>15.7LF</b>	<b>—</b>	<b>1 5 2</b>	<b>—</b>	<b>LF</b>
TYPE	DIMENSIONS		IMPEDANCE		LEAD FREE


#### SHAPES AND DIMENSIONS

UNIT : mm

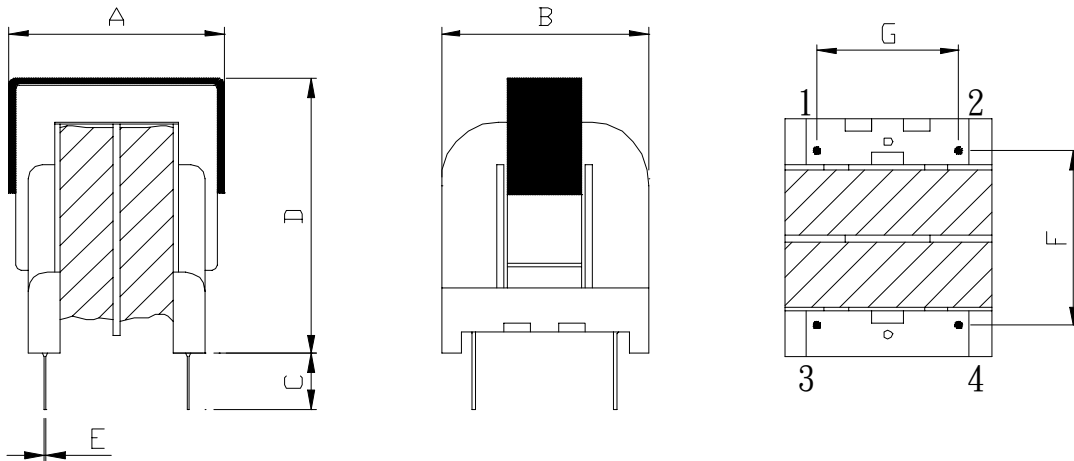

**A=23.0Max. B=19.0Max. C=4±1.0 D=28.0 max. E=0.7±0.1 F=10±0.5 G=13±0.5**

Schematic :

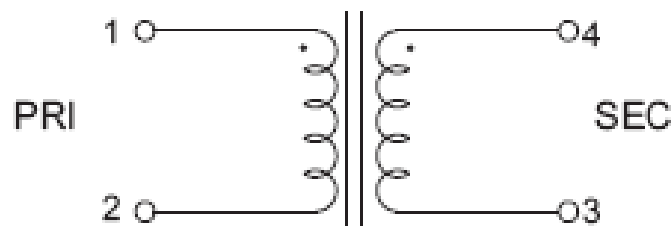

## UU15.7LF SERIES ~ Common Mode Choke



RoHS Compliant

### AC Line Filters

#### DESCRIPTION

- Through-Hole off-line common mode inductors .
- Inductance range from 0.70mH to 43.2 mH .
- Provide significant attenuation of common noise across a broad range of frequencies . .
- UU15.7 families are low cost, high efficiency choke coil designed to virtually eliminate line conducted common mode noise .

#### APPLICATIONS

- Off-line power supplies.
- Protects AC input from effects of switching regulators .
- DC - DC Converters .
- Computer , TV , VCR , audio and office equipment . .

#### ELECTRICAL CHARACTERISTICS :

PART NUMBER	Common Mode Inductance ( mH )	RATED CURRENT (Aac)	RATED VOLTAGE ( V )	INSULATION RESISTANCE ( M ohm )
UU15.7LF-212-LF	2.20 min.	2.2	300	100min.
UU15.7LF-302-LF	3.20 min.	1.9	300	100min.
UU15.7LF-472-LF	4.70min.	1.5	300	100min.
UU15.7LF -682-LF	6.80min.	1.3	300	100min.
UU15.7LF-123-LF	12.0 min.	1.0	300	100min.
UU15.7LF-153-LF	15.0 min.	0.8	300	100min.
UU15.7LF-223-LF	22.0 min.	0.6	300	100min.

- 1) Test Frequency : 1KHZ / 1V
- 2) Operating Temperature Range : -40°C to + 85 °C range is application specific.
- 3) Winding Temperature Rise (at Rated Current) : 60K max.
- 4) Packaging : Supplied in bulk packaging.