

SDC4D22 SERIES

SMD Shielded Power Inductors




RoHS Compliant

PART NUMBERING SYSTEM

SDC	4D22	—	100N	—	LF
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

SHAPES AND DIMENSIONS


UNIT : mm

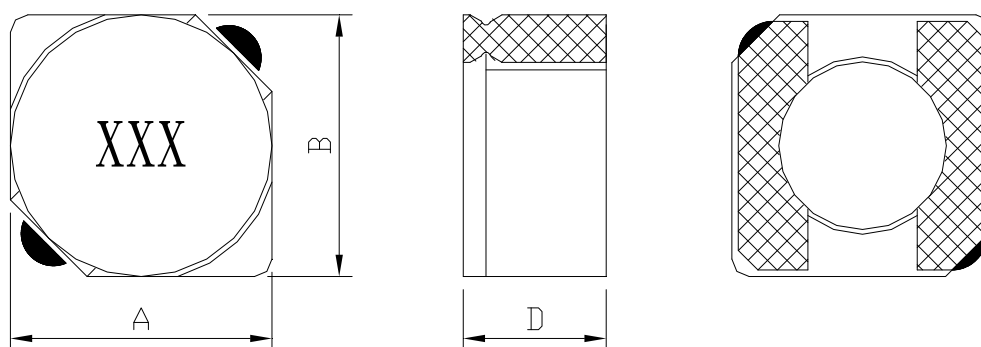

A=5.0 Max. B=5.0 Max. D=2.4 Max.

PCB LAYOUT

UNIT : mm

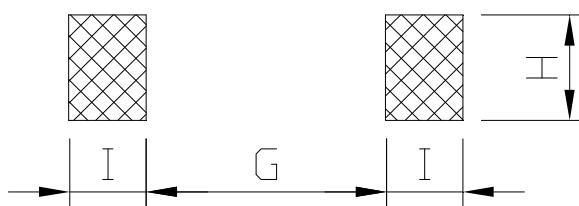

G=1.5 Max. H=5.3 Max. I=1.9 Max.

FEATURES

- Only 5 mm square and 2.4 mm high
- Magnetically shielded
- Saturation current rating up to 2.0 Amps
- Inductance ratings from 1.5 to 150 μ H
- Very high reliability and low cost
- **RoHS-compliant.** 260°C compatible. Matte tin over nickel over phos bronze terminations

SDC4D22 SERIES

SMD Shielded Power Inductors



RoHS Compliant

SPECIFICATION TABLE

PART NUMBER	INDUCTANCE (μ H)	DCR (Ω) (Max.)	Isat (A)	Irms (A)	TEST FREQ. (f)
SDC4D22-1R5N-LF	1.5 $\pm$ 30%	18.3m	2.00	4.20	100KHz
SDC4D22-1R8N-LF	1.8 $\pm$ 30%	21.6m	1.90	3.70	100KHz
SDC4D22-2R3N-LF	2.3 $\pm$ 30%	25.4m	1.80	3.60	100KHz
SDC4D22-3R3N-LF	3.3 $\pm$ 30%	35.1m	1.40	3.07	100KHz
SDC4D22-3R9N-LF	3.9 $\pm$ 30%	40.2m	1.30	3.04	100KHz
SDC4D22-4R7N-LF	4.7 $\pm$ 30%	55.9m	1.10	2.08	100KHz
SDC4D22-5R6N-LF	5.6 $\pm$ 30%	62.0m	1.05	2.05	100KHz
SDC4D22-6R8N-LF	6.8 $\pm$ 30%	88.0m	1.00	1.95	100KHz
SDC4D22-8R2N-LF	8.2 $\pm$ 30%	96.5m	0.90	1.85	100KHz
SDC4D22-100N-LF	10 $\pm$ 30%	0.102	0.80	1.82	100KHz
SDC4D22-120N-LF	12 $\pm$ 30%	0.110	0.75	1.80	100KHz
SDC4D22-150N-LF	15 $\pm$ 30%	0.127	0.68	1.59	100KHz
SDC4D22-180N-LF	18 $\pm$ 30%	0.169	0.60	1.41	100KHz
SDC4D22-220N-LF	22 $\pm$ 30%	0.200	0.54	1.32	100KHz
SDC4D22-270N-LF	27 $\pm$ 30%	0.283	0.51	1.04	100KHz
SDC4D22-330N-LF	33 $\pm$ 30%	0.326	0.48	1.02	100KHz
SDC4D22-390N-LF	39 $\pm$ 30%	0.451	0.43	0.85	100KHz
SDC4D22-470N-LF	47 $\pm$ 30%	0.500	0.38	0.82	100KHz
SDC4D22-560N-LF	56 $\pm$ 30%	0.555	0.36	0.72	100KHz
SDC4D22-680N-LF	68 $\pm$ 30%	0.634	0.33	0.67	100KHz
SDC4D22-820N-LF	82 $\pm$ 30%	0.795	0.30	0.58	100KHz
SDC4D22-101N-LF	100 $\pm$ 30%	0.880	0.25	0.55	100KHz
SDC4D22-121N-LF	120 $\pm$ 30%	1.140	0.23	0.52	100KHz
SDC4D22-151N-LF	150 $\pm$ 30%	1.350	0.21	0.47	100KHz

- Test frequency at 100KHz / 0.1Vrms.
- Isat : DC current at which the inductance drops 35% (typ) from its value without current.
- Irms: The actual current when temperature of coil becomes $\Delta 40^{\circ}\text{C}$. (Ta=+25°C)
- Operating temperature range -40°C to +125°C , Electrical specifications at 25°C.
- Packing : 13" reel, machine-ready ,embossed plastic tape (2,000 parts per full reel)..


SDC4D22 SERIES

SMD Shielded Power Inductors



RoHS Compliant

PACKAGING SPECIFICATION

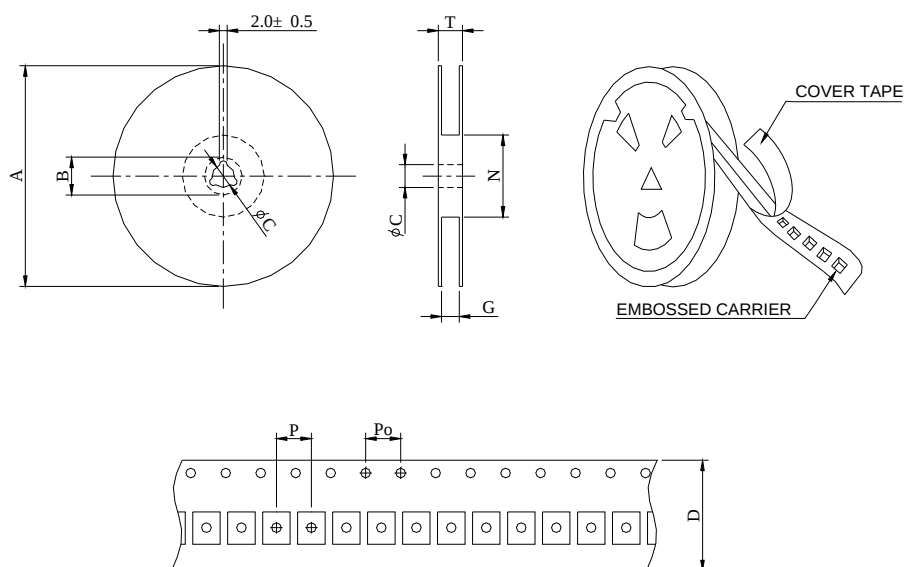

SERIES	STAYLE	Q' TY (PCS)	DIMENSIONS (m/m)								
			A	B±0.8	C±0.5	D	G ⁺⁰	N ⁻⁰	P	Po	T
SDC4D22	13-16	2000	330	21	13	16	18	50	8	4	22.4